




GSS
SYSTEM

THE WORLD'S MOST **FLEXIBLE** POWER OUTLET SYSTEM





GSS SYSTEM

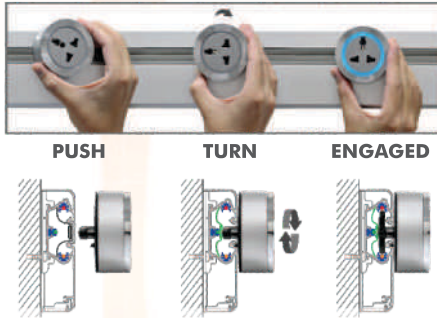

FUTURE PROOF

Investments are protected. Once the track is installed, adding new power outlet is just a twist away. No more drilling, hacking, delays, and costly installation bills. GSS system is maintenance free.

FLEXIBILITY


Free the Power! Power outlets can be anywhere. You can add, remove, and re-position power outlets anywhere along the tracks



ULTRA SAFE

Patented GSS System is one of the safest systems in the world. It grounds every conductive object come into contact with the power track.

Undergo 1 mm probe test, no object larger than 1 mm in diameter can come into contact with any wires.



MULTI SYSTEM

Adaptors are compatible with all major power outlet system in the world. Eubiq is widely accepted in worldwide market.



HIGH DENSITY

More power, less space. Accommodate more power outlets in lesser space. As many as 12 Eubiq adaptors or 16 Eubiq plugs can be engaged in one meter of power track

CABLE MANAGEMENT

GSS system is also capable to handle data cable. Phone line, cable TV, HDMI and LAN cable can run along in dedicated cable compartments. These compartments are isolated from the power core, hence data signals are not subject to Electro-magnetic Interference (EMI).

Kitchen







Living Room






Conference Room

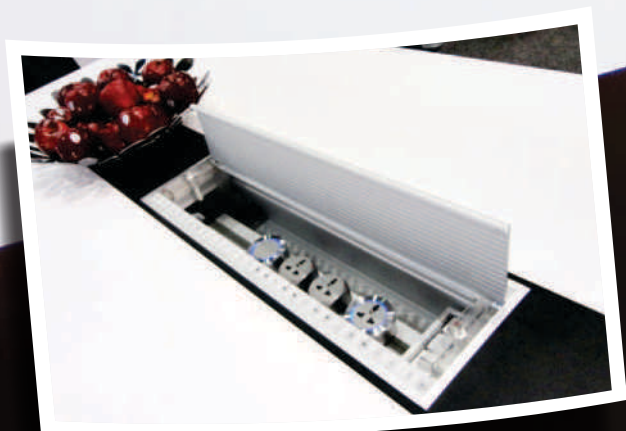

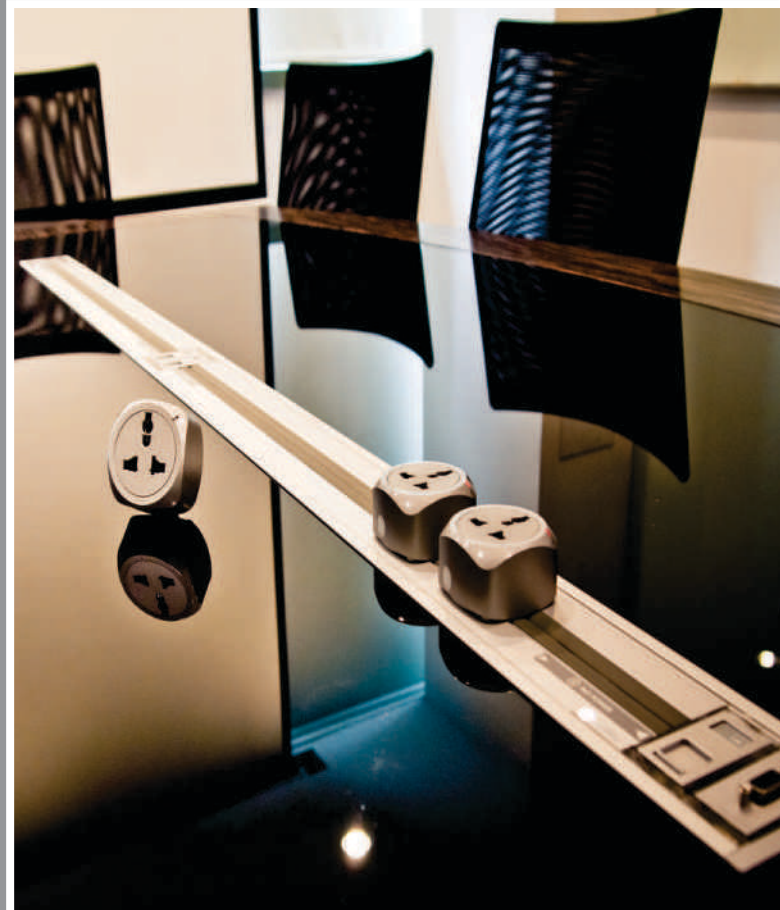

Offices



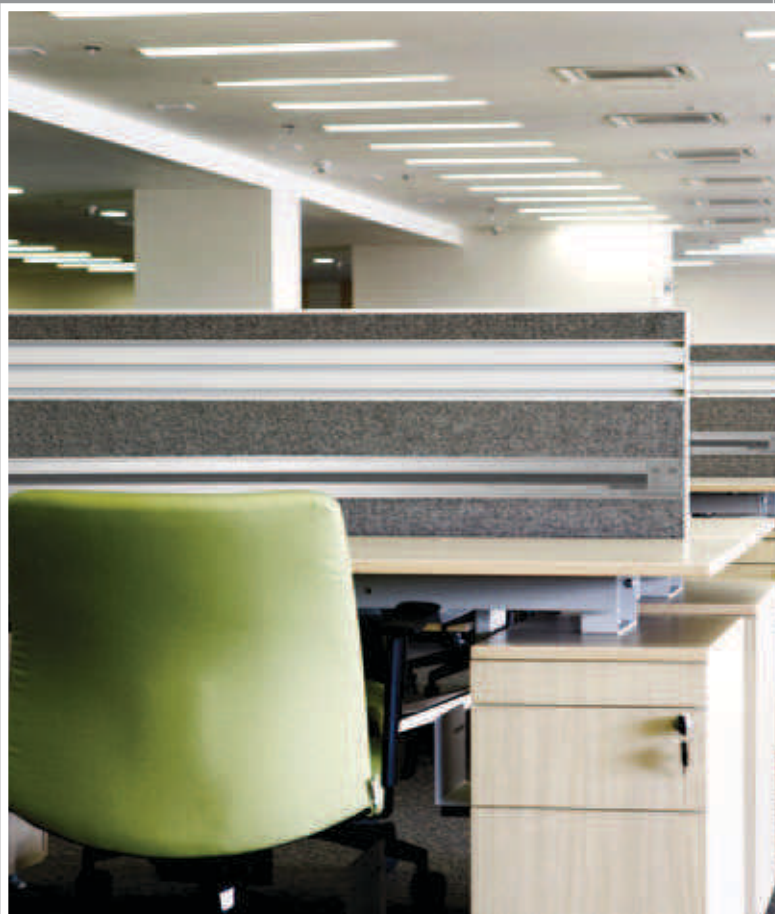

Health Care



Laboratory





SFC3 MODULAR TRACK

ELECTRICAL

Rated Voltage	250V a.c. Single-phase
Rated Current	32 Amp maximum
Frequency	50Hz / 60Hz
Rated Impulse Withstand Voltage	4000V a.c.
Connection of Adaptor or Tap-off Unit	Intended to be connected and disconnected when system is energized and with a load connected
Terminal Capacity: Live, Neutral & Earth	1.25 mm ² to 6 mm ²

ENVIRONMENTAL

Ambient Operating Temperature	-5°C to +55°C (not to exceed an average of more than 35°C in any 24 hours period)
Maximum Installation Altitude	2000 meters
Resistance to Impact	Heavy Impact
Degree of Protection	IP4X
Degree of Pollution	2 (Non-conductive pollution with temporary conductivity caused by condensation)

MATERIAL

Track	Aluminium
Insulation	Polycarbonate

SIZE AND WEIGHT (Based On 1 meter Length)

Overall Dimension (Width x Depth)	62mm x 26mm
Weight	Estimated 1.2 kilograms

Compliance	IEC EN 61534-1, IEC EN 61534-21 (DEKRA/KEMA test report) DNV Standard for Certification No 2.4 (PSB Test Report)
------------	---


Guarantee	2 years subject to Eubiq Limited Warranty Statement (Applicable to track ONLY)
-----------	---

Article No	Products Description	Length
827.41.001	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	300mm
827.41.002	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	400mm
827.41.003	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	600mm
827.41.004	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	800mm
827.41.005	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1000mm
827.41.006	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1200mm
827.41.007	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1400mm
827.41.008	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1600mm
827.41.009	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1800mm
827.41.010	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	2000mm
827.41.021	SFC3 Power Track with End Terminal Set (ET on both side)	300mm
827.41.022	SFC3 Power Track with End Terminal Set (ET on both side)	400mm
827.41.023	SFC3 Power Track with End Terminal Set (ET on both side)	600mm
827.41.024	SFC3 Power Track with End Terminal Set (ET on both side)	800mm
827.41.025	SFC3 Power Track with End Terminal Set (ET on both side)	1000mm
827.41.026	SFC3 Power Track with End Terminal Set (ET on both side)	1200mm
827.41.027	SFC3 Power Track with End Terminal Set (ET on both side)	1400mm
827.41.028	SFC3 Power Track with End Terminal Set (ET on both side)	1600mm
827.41.029	SFC3 Power Track with End Terminal Set (ET on both side)	1800mm
827.41.030	SFC3 Power Track with End Terminal Set (ET on both side)	2000mm



SH 1

Power and cable management track



Article No.	Standard Length
827.41.500	600 mm
827.41.501	900 mm


Article No.	Customised Length
827.41.210 (Only Housing)	300-3600 mm

Standard length comes with hanger and hooks.



SC 2



Ultra compact track



Article No.	Customised Length
827.41.220 (Only Housing)	300-3600 mm



Article No.	Customised Length
827.41.230 (Only Housing)	300-3600 mm




Article No.	Customised Length
827.41.240 (Only Housing)	300-3600 mm



DMS 1

Power and cable management track





Article No.	Customised Length
827.41.200 (Only Housing)	300-3600 mm

VSF1-MB

Power track and data track



Article No.	Standard Length
827.41.502	800 mm
827.41.503	1000 mm




Article No.	Standard Length
827.41.530	600 mm
827.41.531	800 mm



Article No.	Standard Length
827.41.510	600 mm


Comes with 3 International Travellers Compact Adaptor (827.41.421)



Article No.	Standard Length
827.41.513	600 mm
827.41.514	900 mm



E-TUSCAN



Article No.
827.41.515




Article No.
827.41.520



HP 3

Recess bed head panel






*Special
Order*

HP4-E


Surface mounted modular bed head panel



*Special
Order*

HP 4

Surface mounted modular bed head panel



Comes with Provision for lights

eubiq
GSS

ADAPTORS
ACCESSORIES
MULTIMEDIA CONNECTORS



ADAPTORS

PREMIUM SERIES



INTERNATIONAL TRAVELLER

Article No.: 827.41.423



INDIA COMBO

Article No.: 827.41.422

COMPACT SERIES



INTERNATIONAL TRAVELLER

Article No.: 827.41.421

CLASSIC SERIES



INDIA COMBO

Article No.: 827.41.420

ACCESSORIES



Premium Surge Protector

Article No.: 827.41.425



Premium USB Charger

Article No.: 827.41.424



Rewirable Plug



Kitchen Rail/ Hook

Article No.: 827.41.351 (RAIL)	Length: 400 mm
827.41.352 (RAIL)	600 mm
Article No.: 827.41.360 (HOOK)	



Aladin LED Task Light

Article No.: 827.41.447

COILED CORDSET




Article No.: 827.41.432



Article No.: 827.41.431



Article No.: 827.41.430

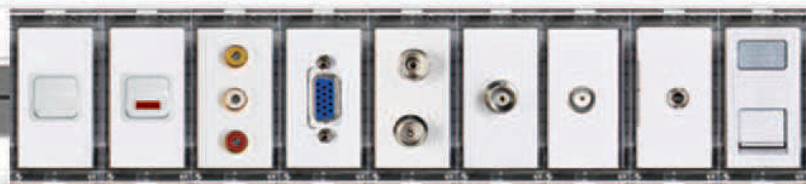

MULTIMEDIA CONNECTORS



DS3
Datacom Socket
Housing

Article No.	
827.41.441	Only mounting frame
827.41.442	With connector



DS4
Datacom Socket
Housing

Article No.	
827.41.443	Only mounting frame
827.41.444	With connector



Cat 6e Jack
(Tel / Data)

Article No.:	827.41.458
--------------	------------



Cat 5e Jack
(Tel / Data)



VGA 15-pin
(Female/ Male)

Article No.	
827.41.448	Only mounting frame
827.41.449	With connector



Stereo Audio
3.5mm

Article No.	
827.41.452	Only mounting frame
827.41.453	With connector



HDMI

Article No.	
827.41.450	Only mounting frame
827.41.451	With connector



Audio Video
(RCA)

Article No.	
827.41.454	Only mounting frame
827.41.455	With connector



USB Type A

Article No.	
827.41.456	Only mounting frame
827.41.457	With connector



ON/OFF Switch
(White) - 10AMP

Article No.	
827.41.445	Without switch
827.41.446	With switch



DS 3b
Blank Data Insert

Article No.:	
827.41.440	Only mounting frame