

RIO line of fans

Construction and repair • Ventilation • Exhaust fans • DICITI

DICITI®



Additional options



Exhaust fans for wall and ceiling application.

For mounting into ventilation shafts or junction with air ducts.

100 and 125 mm flange diameter.

Tasteful design of the solid face panel with smooth lines.

Ball-bearing motor with an extended service life (up to 40 000 hours of continuous operation).

Noiseless back-draught shutter with rubber stoppers.

Fits for ceiling mounting (back-draught shutter must be removed).

IP24 Ingress protection rating for electrical equipment.



Frequently bought together



RIO 4C
Dark gray metal



RIO 4C



RIO 4C
Gray metal



RIO 4C
Obsidian

Show more







Matt white



Ivory



Champagne



Gold



Matt black



Obsidian



Chrome




Dark gray metal



Gray metal



Smart controllers are designed to bring more comfort. Timer, along with humidity and photo sensors, allow to customize operation algorithms of the device. And airing mode can take care of the home environment anytime.




Mounting pattern makes installation easier. It helps with dimensions and defining mounting spots position.




Overall dimensions

Item code	A	X	E	C	d	F*
RIO 4	170	135	74	38	98	6
RIO 5	200	160	79	38	123	6

* referred only to fans equipped with a back-draught shutter

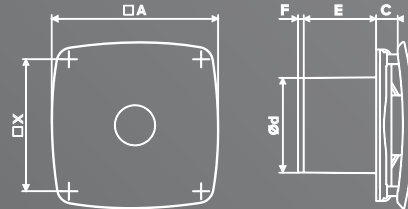

Performance curve

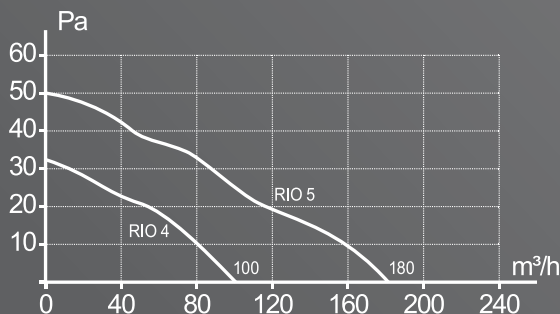

Technical specifications

Specifications	RIO 4	RIO 5
Diameter, mm	98	123
Power consumption, W	14	16
Capacity, m3/h	100	180
Pressure, Pa	32	50
Noise level, dB(A)	32	33
Current consumption, A	0,06	0,07