




EXHAUST METAL AIR DISC VALVES

Exhaust type metal air disc valves are specifically designed for low and medium pressure ventilation systems.

- Available diameters are 100mm, 125mm, 150mm, 160mm & 200 mm
- Easy installation on wall or ceiling
- Manufactured from sheet steel painted white RAL9010 satin
- The valve body is equipped with a cellular plastic gasket to form air tight seal
- The air flow is adjusted by rotating the control disc
- Simple and effective design for easy application
- Supplied with mounting ring
- Mounting ring is made of galvanized steel sheet

EXHAUST MODEL	SIZE	DIMENSIONS (mm)			
		Ø A	Ø B	C	Ø D
CONAIR 26	Ø 100	138	75	40	97.5
CONAIR 27	Ø 125	164	100	46	122.5
CONAIR 28	Ø 150	202	120	50	147.5
CONAIR 29	Ø 160	211	130	54	157.5
CONAIR 30	Ø 200	248	158	63	197.5

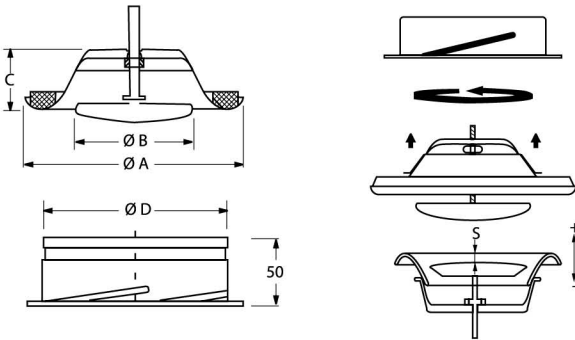

QUICK SELECTION CHART (EXHAUST TYPE)

EXHAUST	AIR FLOW (L/S) AT SOUND LEVEL		
	25 dB (A)	30 dB (A)	35 dB (A)
CONAIR 26	30	37	45
CONAIR 27	46	57	68
CONAIR 28	58	70	81
CONAIR 29	64	80	98
CONAIR 30	120	140	170




SUPPLY METAL AIR DISC VALVES

Supply type metal air disc valves are specifically designed for low and medium pressure ventilation systems.

- Available diameters are 100mm, 125mm, 150mm, 160mm & 200 mm
- Easy installation on wall or ceiling
- Manufactured from sheet steel painted white RAL9010 satin
- The valve body is equipped with a cellular plastic gasket to form air tight seal
- The air flow is adjusted by rotating the control disc
- Simple and effective design for easy application
- Supplied with mounting ring
- Mounting ring is made of galvanized steel sheet

SUPPLY MODEL	SIZE	DIMENSIONS (mm)			
		Ø A	Ø B	C	Ø D
CONAIR 26 S	Ø 100	138	92	40	97.5
CONAIR 27 S	Ø 125	164	111	46	122.5
CONAIR 28 S	Ø 150	202	135	50	147.5
CONAIR 29 S	Ø 160	211	147	54	157.5
CONAIR 30 S	Ø 200	248	194	63	197.5

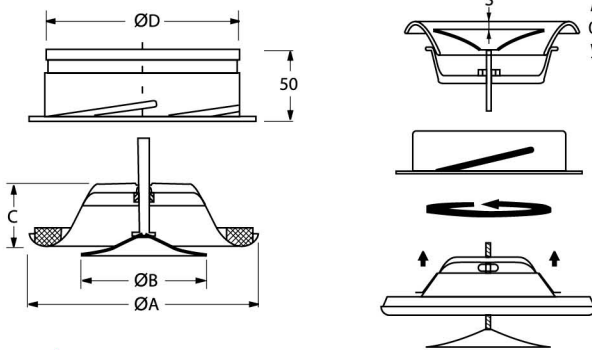

QUICK SELECTION CHART (SUPPLY TYPE)

SUPPLY	AIR FLOW (L/S) AT SOUND LEVEL		
	25 dB (A)	30 dB (A)	35 dB (A)
CONAIR 26 S	20	24	30
CONAIR 27 S	40	48	57
CONAIR 28 S	59	68	80
CONAIR 29 S	50	58	65
CONAIR 30 S	80	100	120